

## P/N: 62104-2901

### Copyright

© 2017, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

### Document identity

Publ. No.: 62104-2901

Release:

Commit: 37257

Language: en-US

Modified: 2016-09-15

Formatted: 2017-01-20

### Website

<http://www.flir.com>

### Customer support

<http://support.flir.com>

### Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to [exportquestions@flir.com](mailto:exportquestions@flir.com) with any questions.



### General description

The FLIR T410sp is the first thermography camera for Sports & Performance applications, based on the ergonomic handheld FLIR T400 platform. Ideal for professional work in sports training and athlete's performance analytics, the FLIR T410sp provides unique features such as body overlay, dedicated temperature range and helpful color palettes.

### Benefits:

- Excellent ergonomics: The FLIR T410sp has a tiltable lens and an auto-rotating image, allowing work on all target formats from all positions and angles. The small size and low weight of the camera facilitate its use over a full working day.
- Ease of use: Supporting features like anatomic body overlay and bubble level increase repeatability and help saving time. Color palettes and isotherms enhance the display of relevant phenomena and critical criteria.
- Eco system: You can highlight areas of interest by sketching or adding predefined stamps directly onto the camera's touch screen. Additional data can easily and efficiently be added to the images by a text note, table, or voice recording. Import of images to FLIR Tools or a 3rd party cloud software allows for easy tracking, reporting and documentation. The Wi-Fi connectivity of the FLIR T410sp allows you to connect to smart phones or tablets, for the wireless transfer of images or the remote control of the camera.

### Imaging and optical data

IR resolution	320 × 240 pixels
MSX resolution	320 × 240 pixels
UltraMax	Yes
Thermal sensitivity/NETD	<30 mK @ +30°C (+86°F)
Field of view (FOV)	25° × 19°
Minimum focus distance	0.4 m (1.31 ft.)
Focal length	18 mm (0.7 in.)
Spatial resolution (IFOV)	1.36 mrad
F-number	1.3
Image frequency	60 Hz
Focus	Automatic (one shot) or manual
Digital zoom	2×, 4× and 8×

P/N: 62104-2901

© 2017, FLIR Systems, Inc.

#62104-2901; r. /37257; en-US

Detector data	
Detector type	Focal plane array (FPA), uncooled microbolometer
Spectral range	7.5–13 $\mu\text{m}$
Detector pitch	25 $\mu\text{m}$
Image presentation	
Display	Touch screen, 3.5 in. LCD, 320 $\times$ 240 pixels
Auto orientation	Automatic landscape or portrait
Image adjustment	Auto or manual
Image presentation modes	
Thermal MSX	Thermal image with enhanced detail presentation
Picture in Picture	Resizable and movable IR area on visual image
Measurement	
Object temperature range	20°C to +60°C (68°F to +140°F)
Accuracy	$\pm 1^\circ\text{C}$ ( $\pm 1.8^\circ\text{F}$ ) at 25°C (77°F) nominal.
Measurement analysis	
Spotmeter	1
Emissivity correction	Variable from 0.01 to 1.0 or selected from materials list
Measurement corrections	Emissivity, reflected temperature, relative humidity, atmospheric temperature, object distance
Colors (palettes)	Iron, Rainbow HC, White hot, Black hot, Isotherms
Alarm	
Color Alarm (isotherm)	Above/below/interval
Measurement function alarm	Audible/visual alarms (above/below) on any selected measurement function
Set-up	
Set-up commands	Save options, Programmable button, Reset options, Set up camera, Wi-Fi, Compass, Bluetooth, Language, Time & units, Camera information
Service functions	
Camera software update	Use PC software FLIR Tools
Storage of images	
Image storage	Standard JPEG, including digital photo and measurement data, on memory card
Image storage mode	<ul style="list-style-type: none"> <li>Simultaneous storage of thermal and digital photo in same JPEG file.</li> <li>Optional to store digital photo as a separate JPEG file.</li> </ul>

P/N: 62104-2901

© 2017, FLIR Systems, Inc.

#62104-2901; r. /37257; en-US

Image annotations (in still images)	
Voice	60 seconds (via Bluetooth) stored with the image
Text	Add table. Select between predefined templates or create your own in FLIR Tools
Image description	Add short note (stored in JPEG EXIF tag)
Sketch	Draw on thermal/digital photo or add predefined stamps
METERLiNK	Wireless connection (Bluetooth) to: FLIR meters with METERLiNK
Report generation	<ul style="list-style-type: none"> <li>Instant Report (*.pdf file) in camera including IR and visual images</li> <li>Separate PC software with extensive report generation</li> </ul>
Geographic Information System	
Compass	Camera direction automatically added to every still image
Video recording in camera	
Non-radiometric IR video recording	MPEG-4 to memory card
Visual video recording	MPEG-4 to memory card
Video streaming	
Radiometric IR video streaming	Full dynamic to PC using USB or to mobile devices using Wi-Fi.
Non-radiometric IR video streaming	<ul style="list-style-type: none"> <li>MPEG-4 using Wi-Fi</li> <li>Uncompressed colorized video using USB</li> </ul>
Visual video streaming	<ul style="list-style-type: none"> <li>MPEG-4 using Wi-Fi</li> <li>Uncompressed colorized video using USB</li> </ul>
Digital camera	
Built-in digital camera	3.1 Mpixels with LED light (photo as separate image)
Digital camera, focus	Fixed focus
Digital camera, FOV	Adapts to the IR lens
Built-in digital lens data	FOV 53° × 41°
Digital camera, aspect ratio	4:3
Laser pointer	
Laser	Activated by dedicated button
Laser alignment	Position is automatic displayed on the IR image
Laser classification	Class 2
Laser type	Semiconductor AlGaInP diode laser
Laser power	1 mW
Laser wavelength	635 nm (red)

P/N: 62104-2901

© 2017, FLIR Systems, Inc.

#62104-2901; r. /37257; en-US

Data communication interfaces	
Interfaces	USB-mini, USB-A, Bluetooth, Wi-Fi, composite video
METERLiNK/Bluetooth	Communication with headset and external sensors
Wi-Fi	Peer to peer (ad hoc) or infrastructure (network)
SD Card	One card slot for removable SD memory cards
USB	
USB	<ul style="list-style-type: none"> <li>USB-A: Connect external USB device</li> <li>USB Mini-B: Data transfer to and from PC / uncompressed colorized video</li> </ul>
USB, standard	USB Mini-B: 2.0
Composite video	
Video out	Composite
Video, standard	CVBS (ITU-R-BT.470 PAL/SMPTE 170M NTSC)
Video, connector type	4-pole 3.5 mm jack
Radio	
Wi-Fi	<ul style="list-style-type: none"> <li>Standard: 802.11 b/g</li> <li>Frequency range: 2412–2462 MHz</li> <li>Max. output power: 15 dBm</li> </ul>
METERLiNK/Bluetooth	Frequency range: 2402–2480 MHz
Antenna	Internal
Power system	
Battery type	Rechargeable Li ion battery
Battery voltage	3.7 V
Battery capacity	4.4 Ah, at +20°C to +25°C (+68°F to +77°F)
Battery operating time	Approx. 4 hours at +25°C (+77°F) ambient temperature and typical use
Charging system	In camera (AC adapter or 12 V from a vehicle) or 2-bay charger
Charging time	4 h to 90% capacity, charging status indicated by LED's
Charging temperature	0°C to +45°C (+32°F to +113°F)
Power management	Automatic shutdown and sleep mode (user selectable)
AC operation	AC adapter, 90–260 VAC input, 12 V output to camera
Start-up time from sleep mode	Instant on
Environmental data	
Operating temperature range	–15°C to +50°C (+5°F to +122°F)
Storage temperature range	–40°C to +70°C (–40°F to +158°F)
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity +25°C to +40°C (+77°F to +104°F) / 2 cycles

P/N: 62104-2901











© 2017, FLIR Systems, Inc.

#62104-2901; r. /37257; en-US

Environmental data	
EMC	<ul style="list-style-type: none"> <li>ETSI EN 301 489-1 (radio)</li> <li>ETSI EN 301 489-17</li> <li>EN 61000-6-2 (Immunity)</li> <li>EN 61000-6-3 (Emission)</li> <li>FCC 47 CFR Part 15 B (Emission)</li> <li>ICES-003</li> </ul>
Radio spectrum	<ul style="list-style-type: none"> <li>ETSI EN 300 328</li> <li>FCC Part 15.247</li> <li>RSS-210</li> </ul>
Magnetic fields	EN 61 000-4-8, Test level 5 for continuous field (severe industrial environment)
Encapsulation	IP 54 (IEC 60529)
Shock	25 g (IEC 60068-2-27)
Vibration	2 g (IEC 60068-2-6)
Safety	EN/UL/CSA/PSE 60950-1
Physical data	
Camera weight, incl. battery	0.855 kg (1.88 lb.)
Camera size (L × W × H)	106 × 201 × 125 mm (4.2 × 7.9 × 4.9 in.), with built-in lens pointing forward
Tripod mounting	UNC ¼"-20 (adapter needed)
Material	<ul style="list-style-type: none"> <li>Polycarbonate + acrylonitrile butadiene styrene (PC-ABS)</li> <li>Thixomold magnesium</li> <li>Thermoplastic elastomer (TPE)</li> </ul>
Color	Graphite gray and black
Shipping information	
Packaging, type	Cardboard box
List of contents	<ul style="list-style-type: none"> <li>Infrared camera with lens</li> <li>Battery (2 ea.)</li> <li>Battery charger</li> <li>Bluetooth headset</li> <li>Calibration certificate</li> <li>Camera lens cap</li> <li>Hard transport case</li> <li>IR lens, f = 10 mm, 45°</li> <li>Memory card</li> <li>Neckstrap</li> <li>Power supply, incl. multi-plugs</li> <li>Printed documentation</li> <li>Sunshield</li> <li>USB cable</li> <li>Video cable</li> </ul>
Packaging, weight	5.7 kg (12.6 lb.)
Packaging, size	495 × 192 × 370 mm (19.49 × 7.56 × 14.57 in.)
EAN-13	7332558012543
UPC-12	845188013691
Country of origin	Sweden

## Supplies & accessories:


Camera with built-in IR lens f=18 mm (25°)

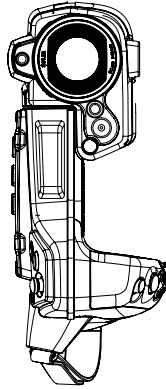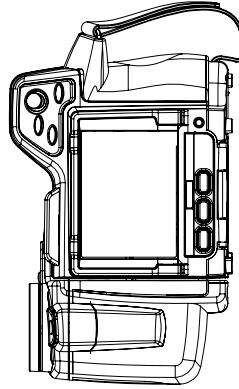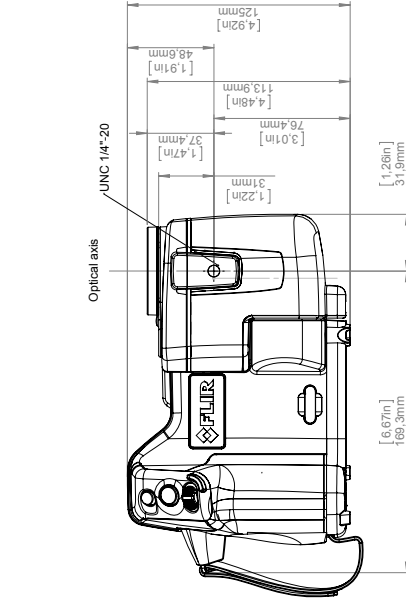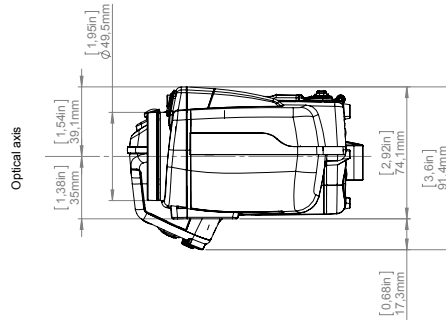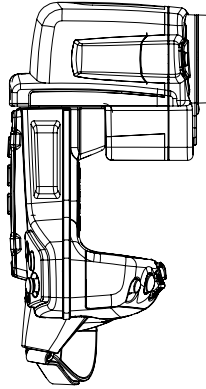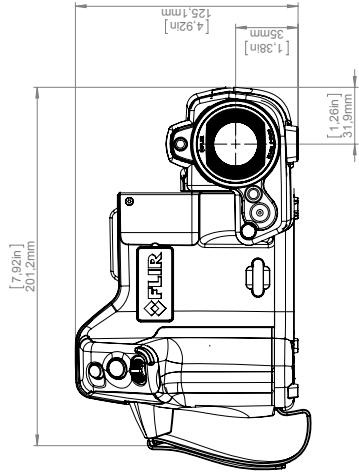

Modified	Check	Drawn by	R&D Thermography	Size A3		Sheet 1(7)	
2012-06-07	JOTA						
Denomination							
Basic Dimensions FLIR T4xx							
				Scale 1:2		Drawing No. T127604	Size A




Camera with Lens IR f=4 mm (90°) incl support

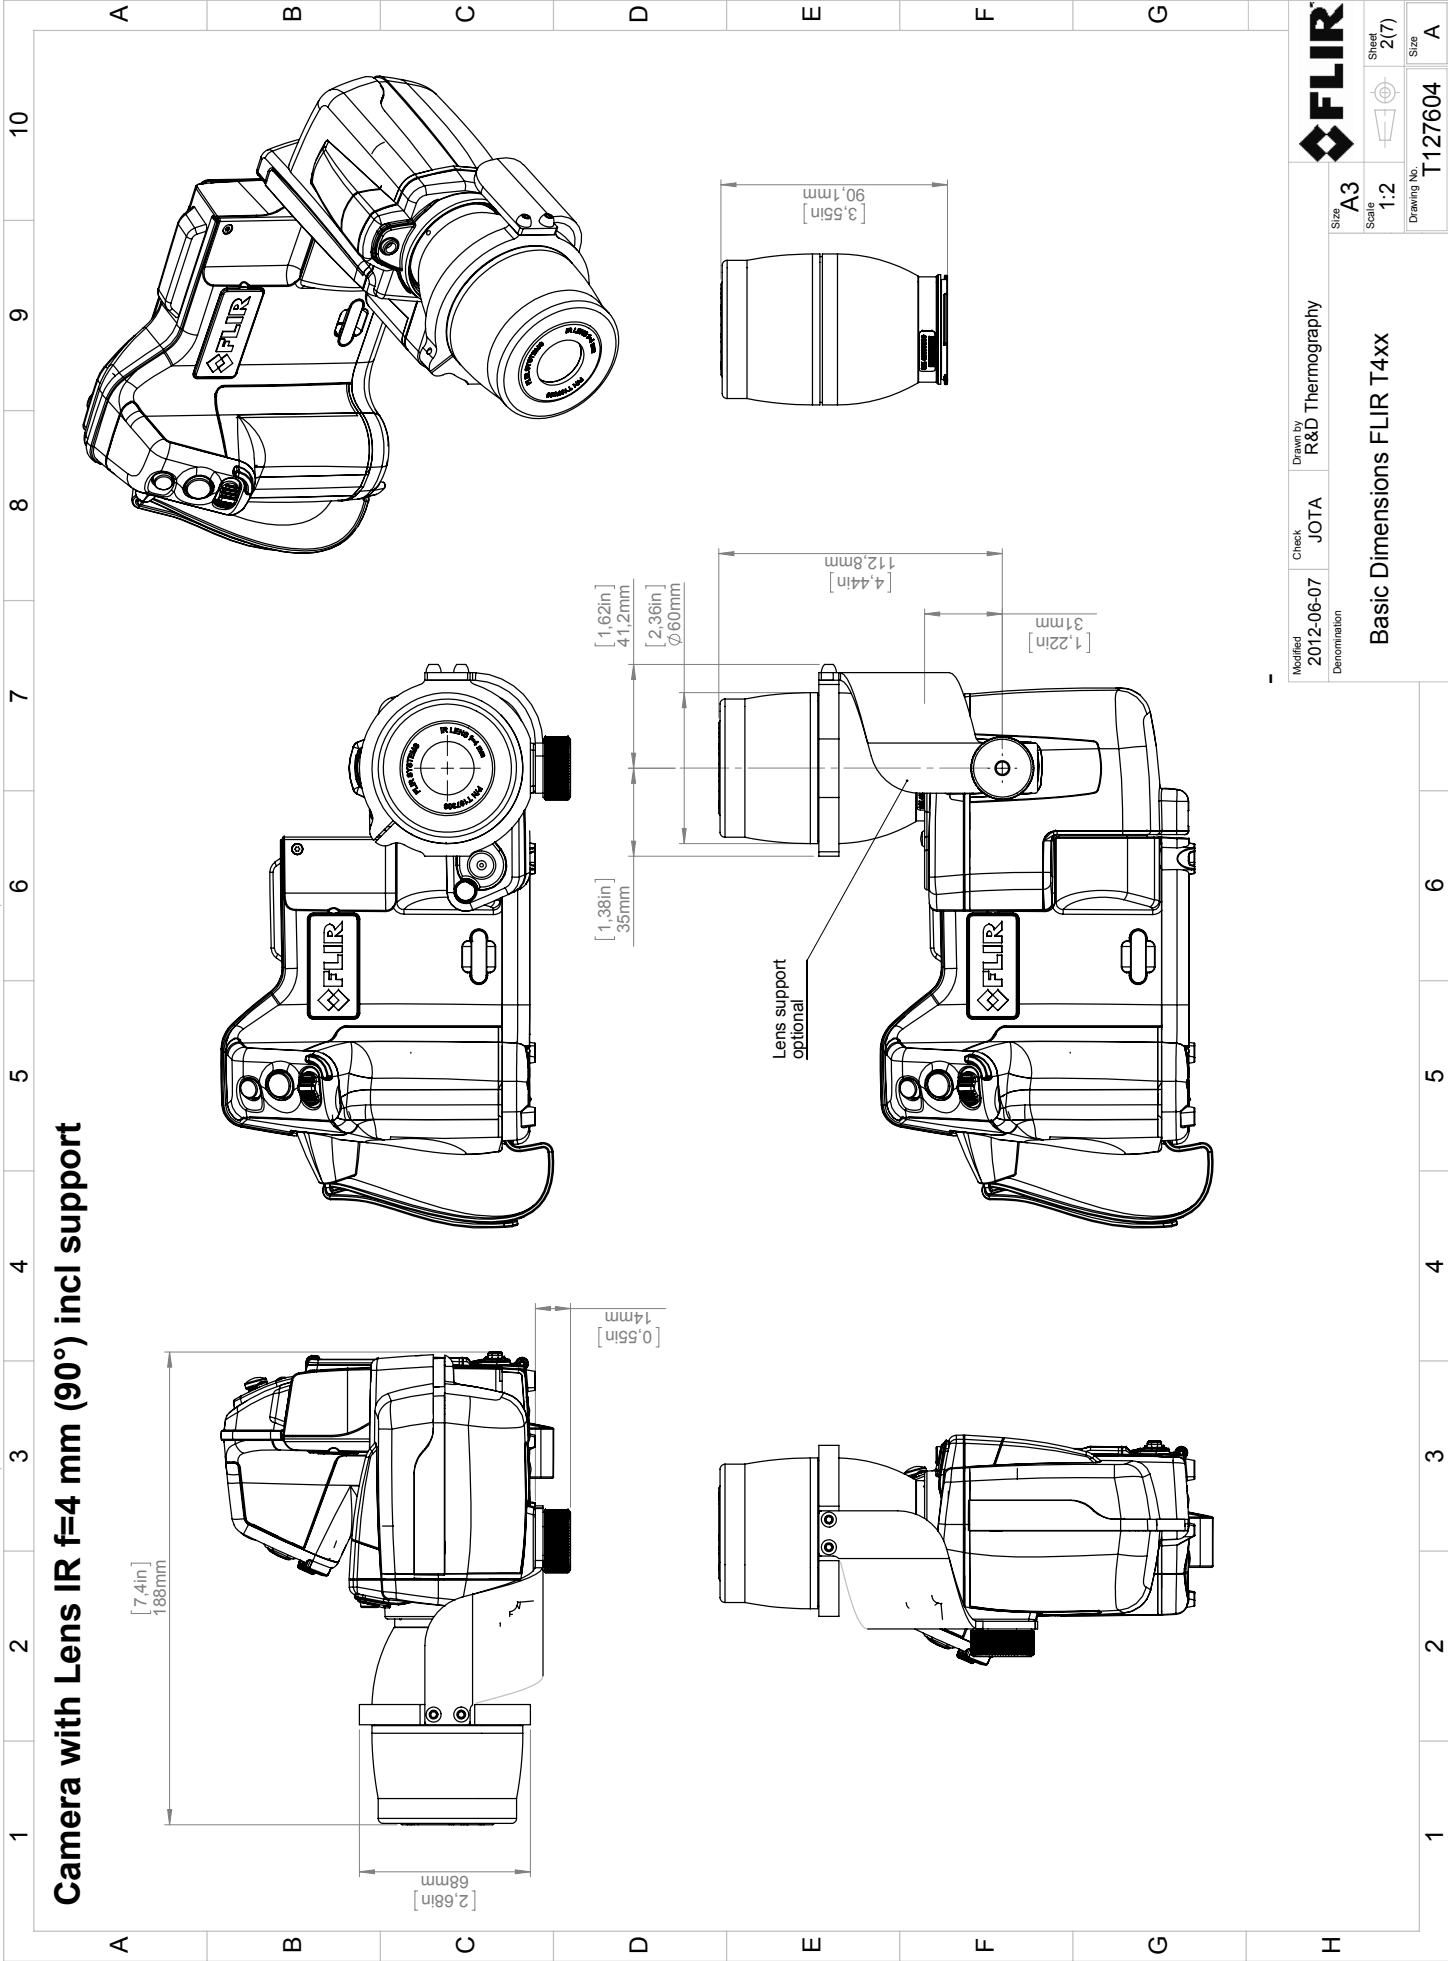

© 2012, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations, license procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

Modified 2012-06-07 Denomination		Check JOTA	Drawn by R&D Thermography		
Size A3		Scale 1:2		 Sheet 2(7)	
Basic Dimensions FLIR T4xx				Drawing No. T127604	
				Size A	





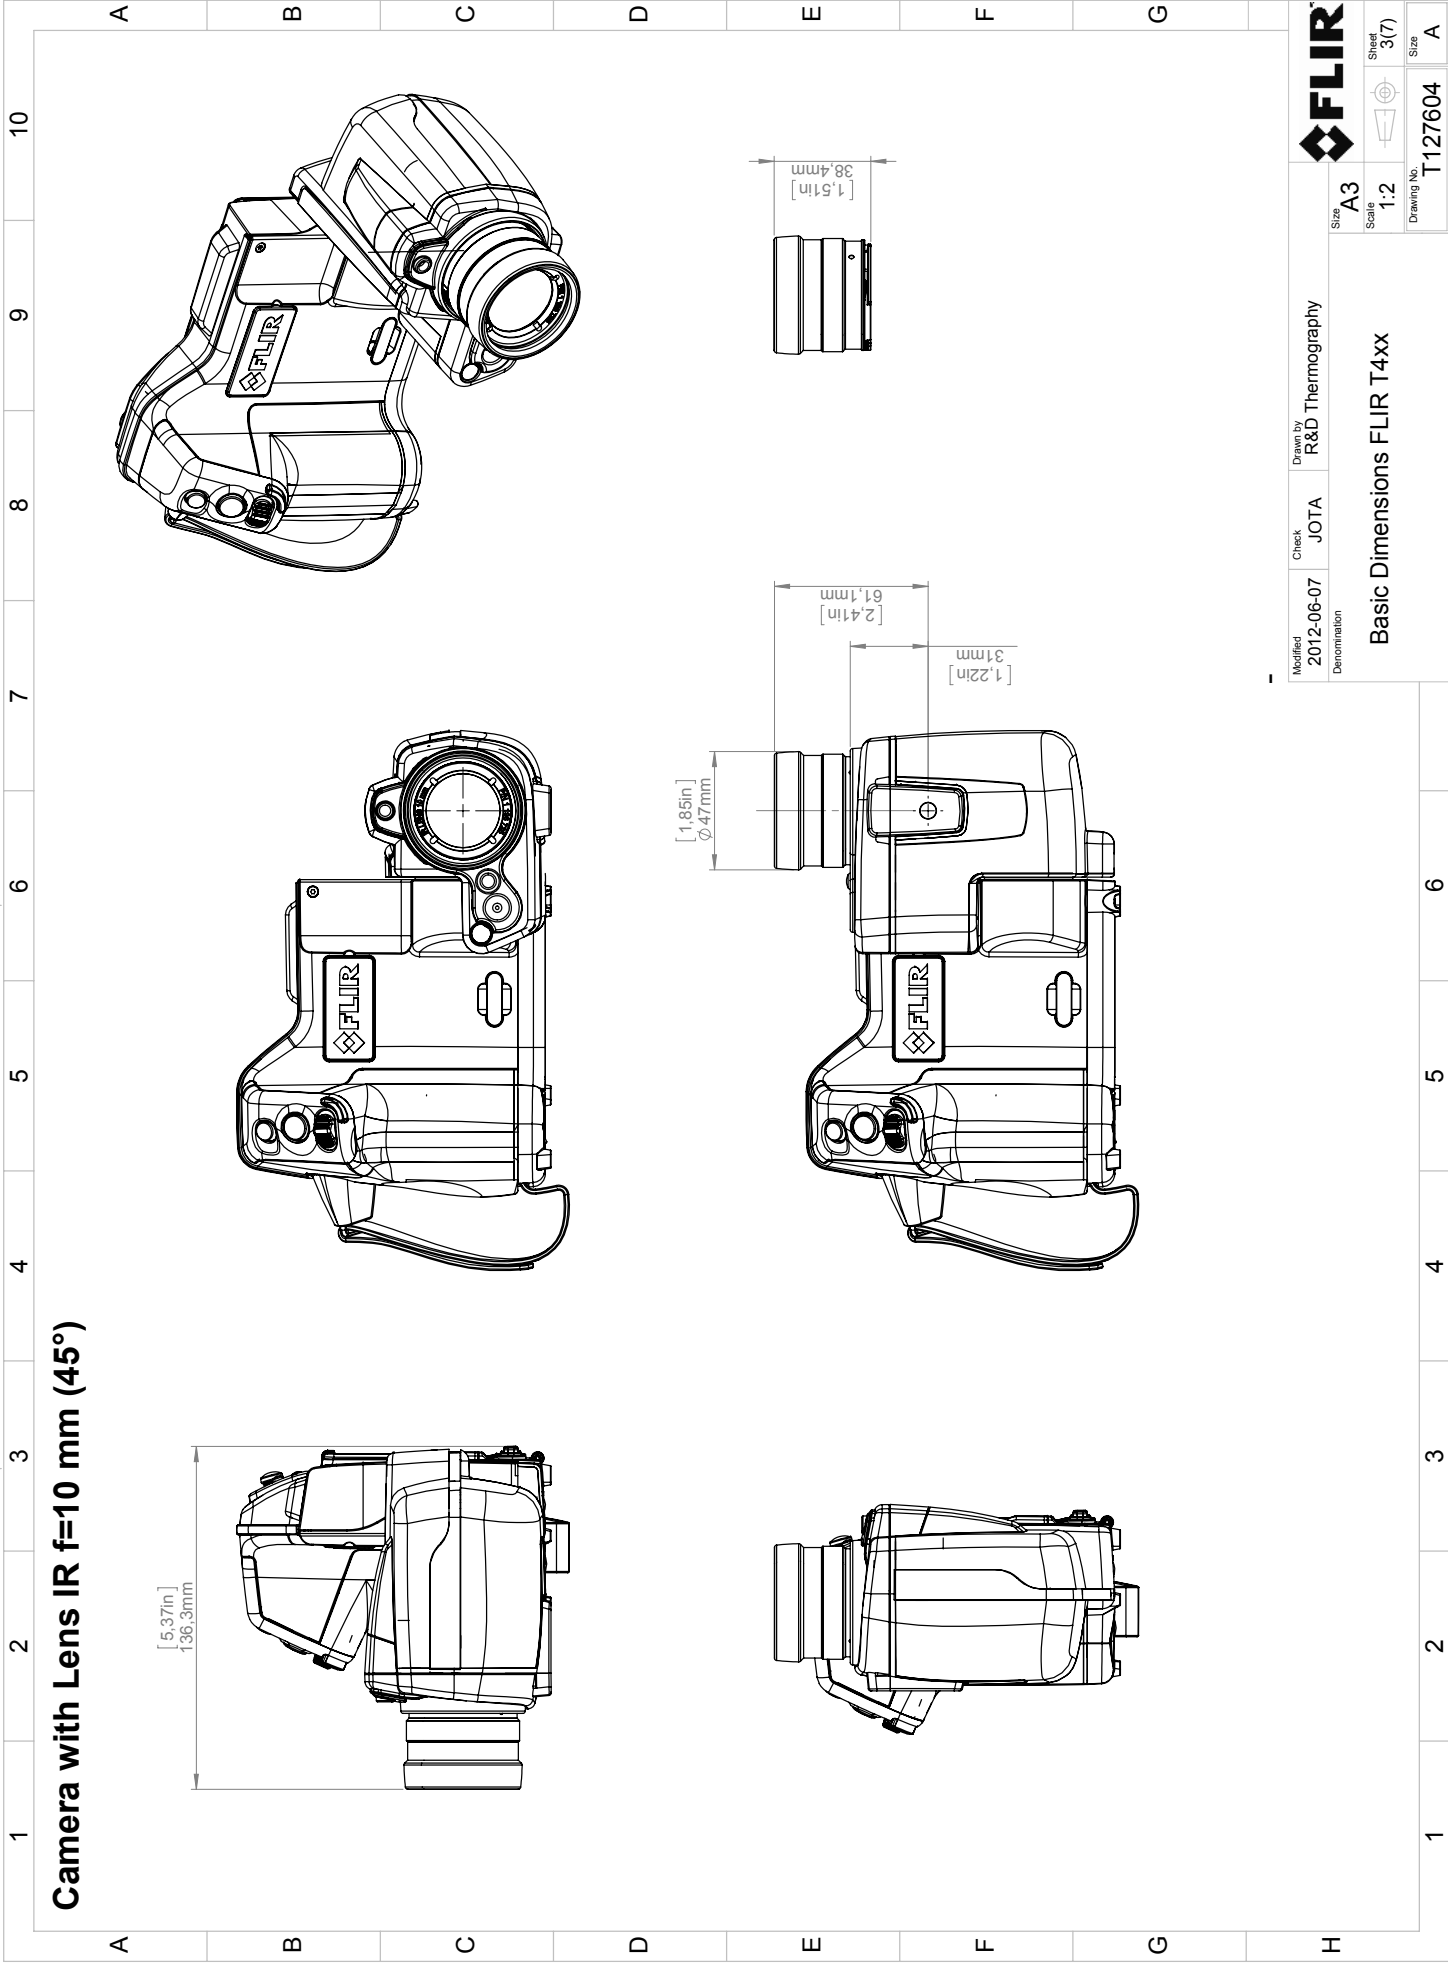


© 2012, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

Modified 2012-06-07 Denomination	Check JOTA	Drawn by R&D Thermography	FLIR		
Basic Dimensions FLIR T4xx			Size A3	Scale 1:2	Sheet 3(7)
			Drawing No. T127604	Size A	




Camera with Lens IR f=30 mm (15°)

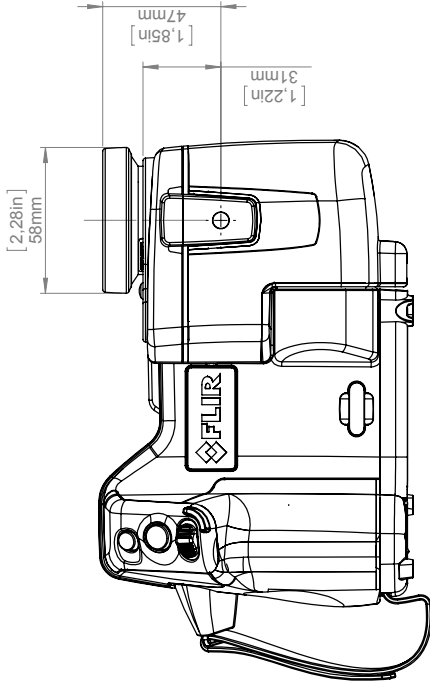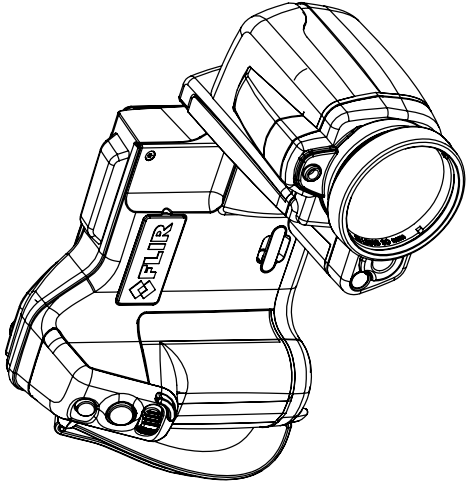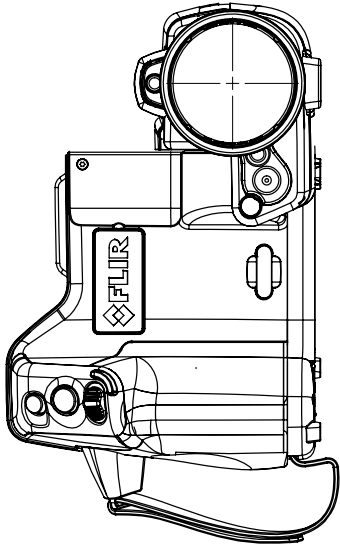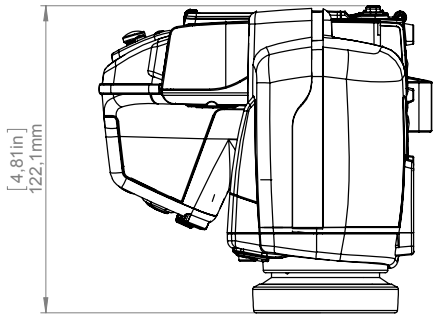

Modified 2012-06-07 Denomination	Check JOTA	Drawn by R&D Thermography	FLIR™			
			Size A3		Sheet 4(7)	Size A
			Scale 1:2			
			Drawing No. T127604			
Basic Dimensions FLIR T4xx						







Camera with Lens IR f=76 mm (6°) incl support

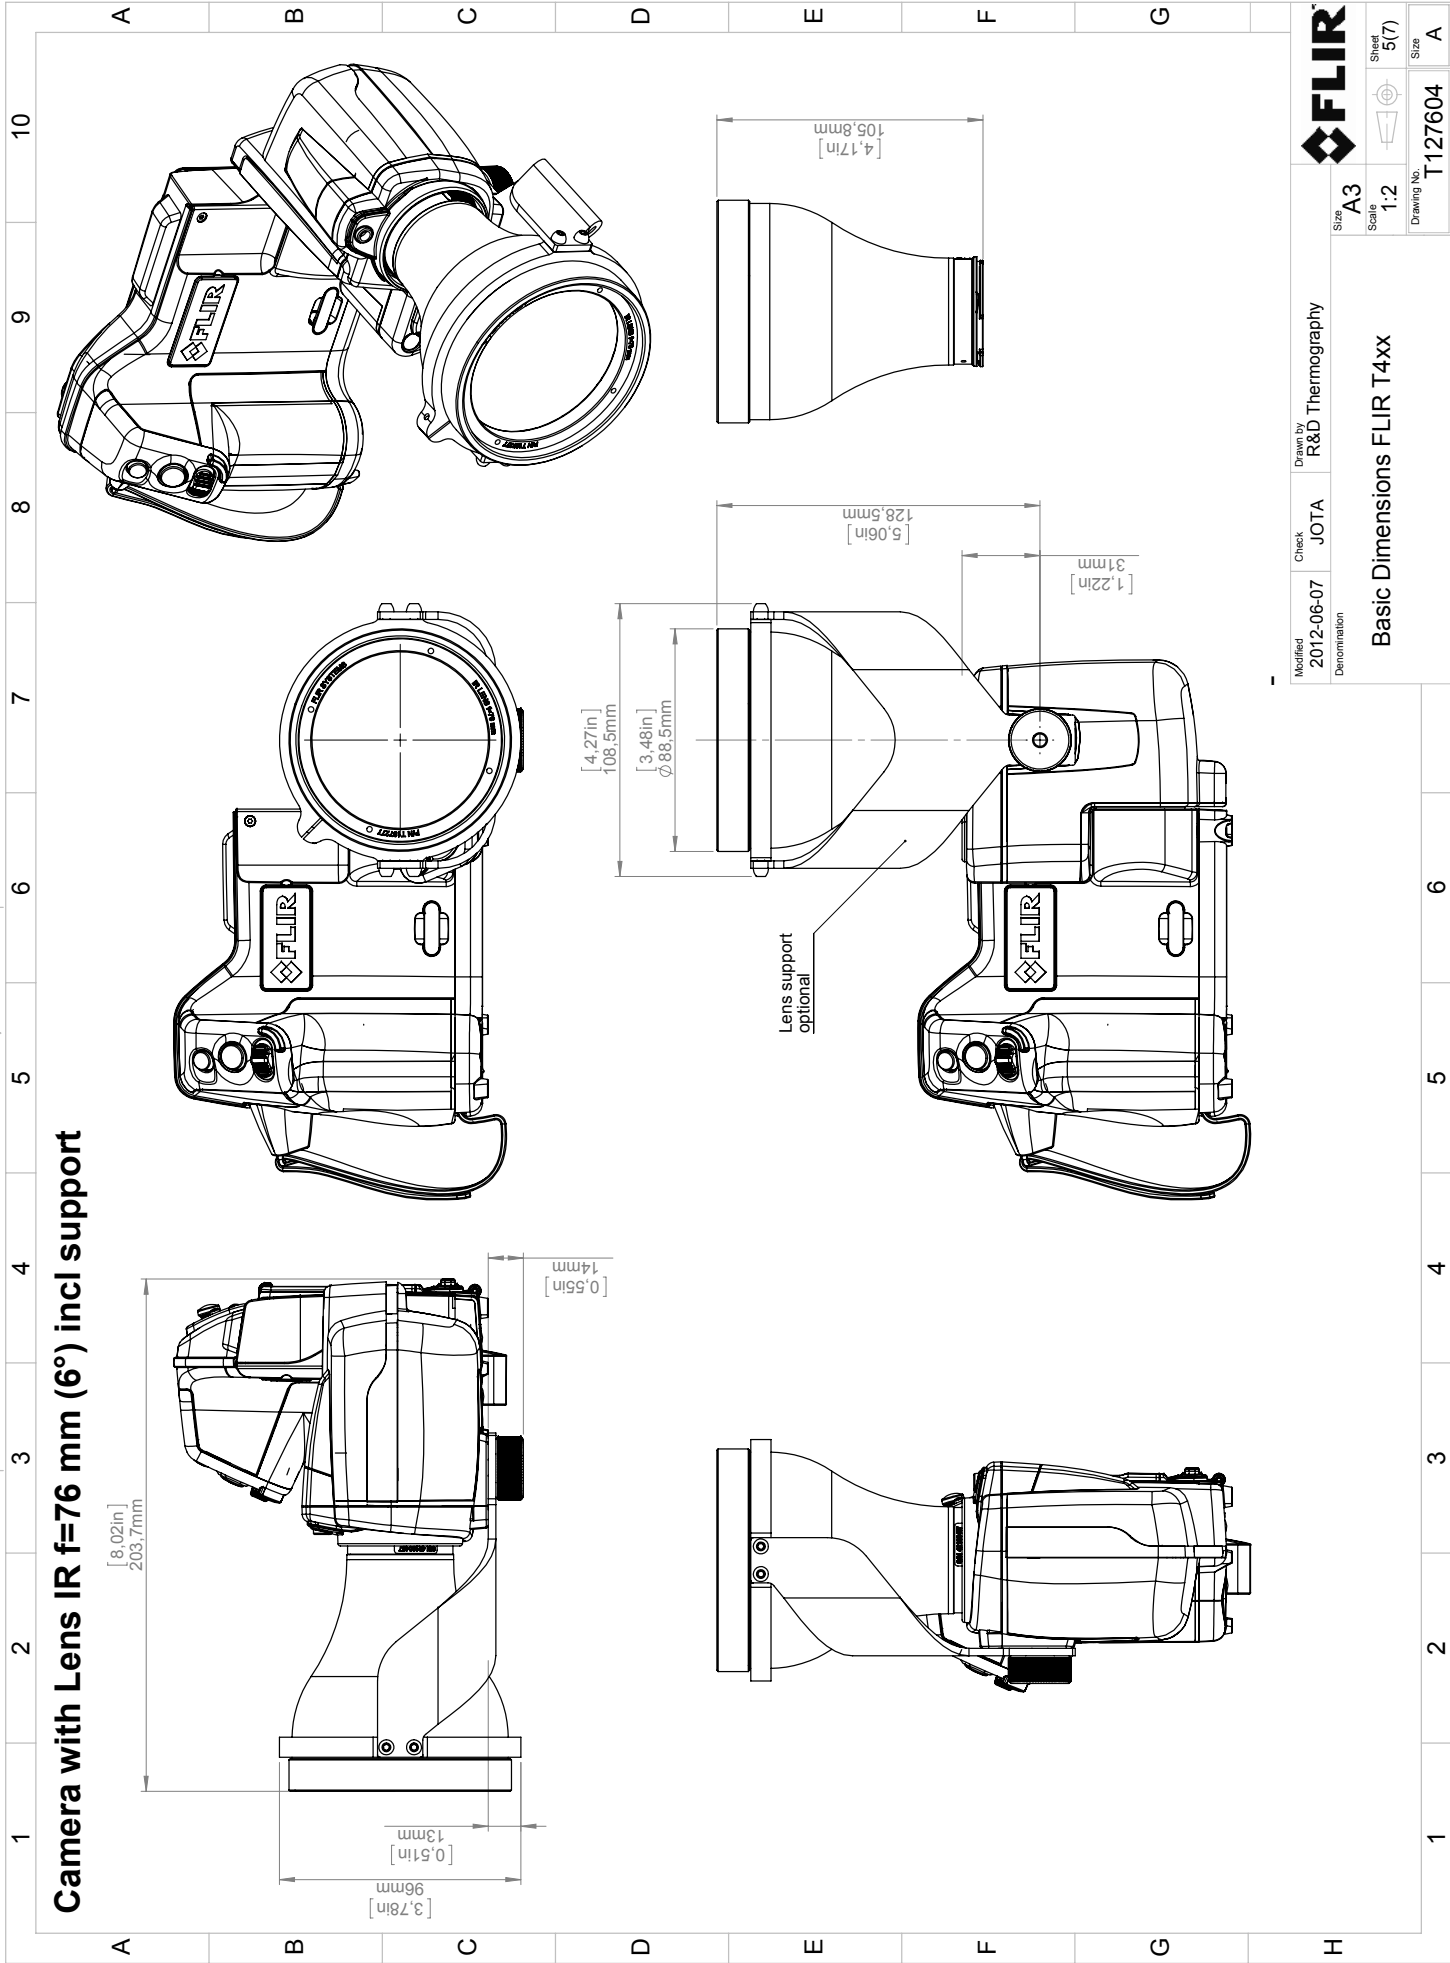

© 2012, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.






Modified 2012-06-07 Denomination		Check JOTA	Drawn by R&D Thermography		
Size A3		Scale 1:2			
Size A		Drawing No. T127604			Sheet 5(7)
Basic Dimensions FLIR T4xx					
A					

Camera with Close-up lens 2X (50 µm)

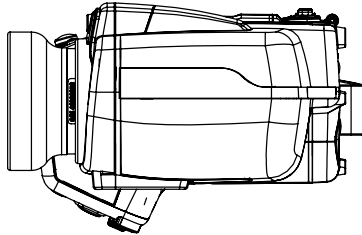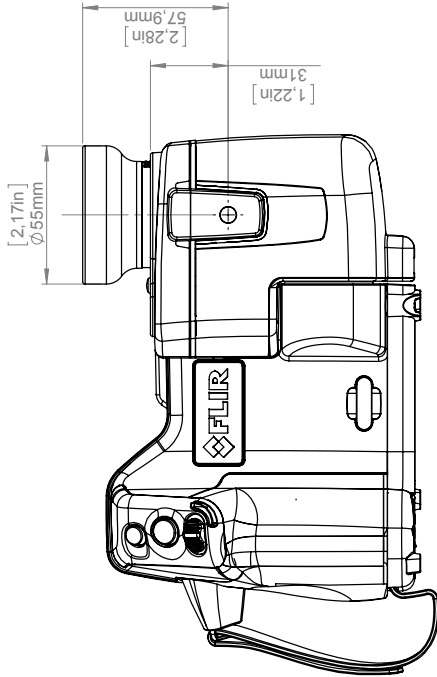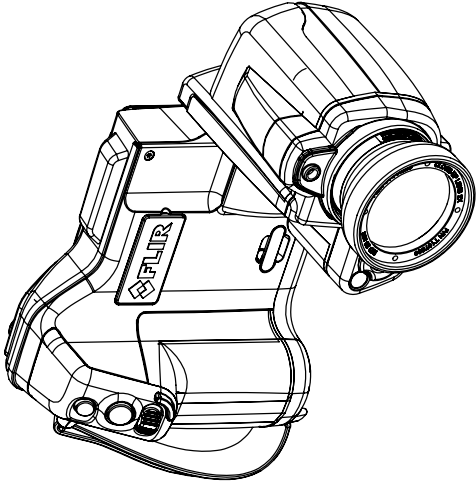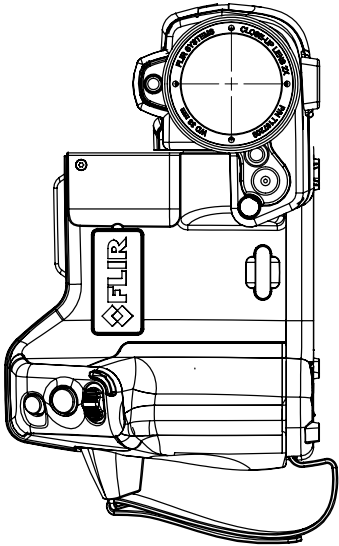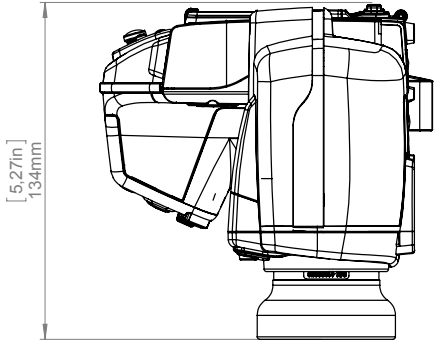

Modified 2012-06-07 Denomination	Check JOTA	Drawn by R&D Thermography	FLIR		
Basic Dimensions FLIR T4xx			Size A3	Sheet 6(7)	Size A
			Scale 1:2		
			Drawing No. T127604		

Camera with Close-up lens 4X (100 µm)

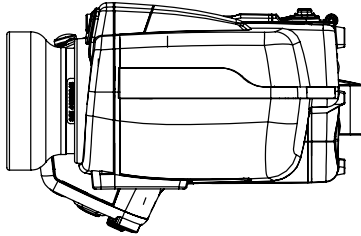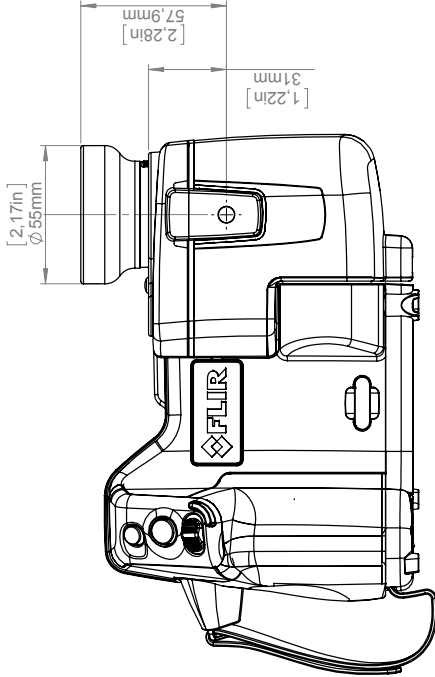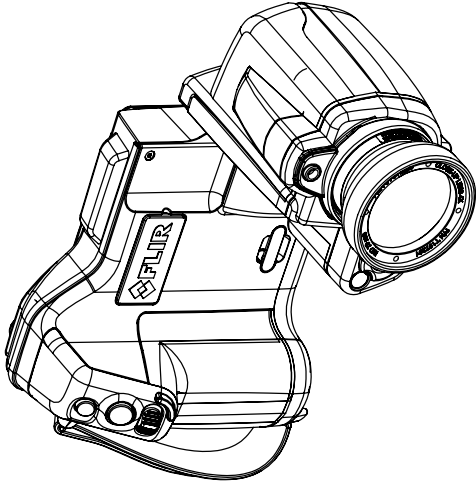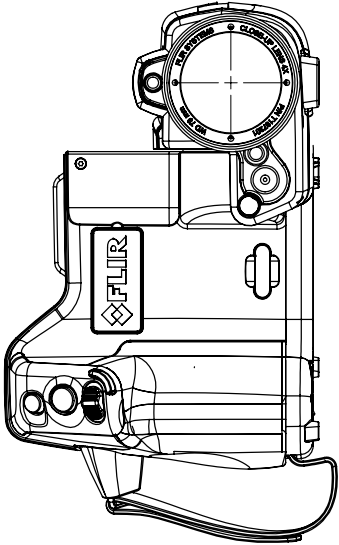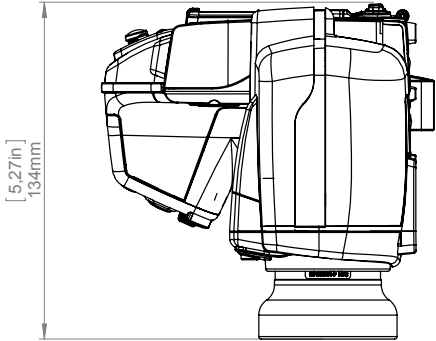

Modified 2012-06-07 Denomination	Check JOTA	Drawn by R&D Thermography	FLIR		
			Size A3	Sheet 7(7)	Size A
			Scale 1:2	Drawing No. T127604	
			Basic Dimensions FLIR T4xx		

October 15, 2012

AQ125912

## CE Declaration of Conformity

This is to certify that the System listed below have been designed and manufactured to meet the requirements, as applicable, of the following EU-Directives and corresponding harmonising standards. The systems consequently meet the requirements for the CE-mark.

### Directives:


<b>Directive 2004/108/EC;</b>	<b>Electromagnetic Compatibility</b>
<b>Directive 2006/95/EC;</b>	<b>"Low voltage Directive" (Power Supply)</b>
<b>Directive 1999/5/EC</b>	<b>"R&amp;TTE on radio equipment and telecommunications terminal equipment"</b>
<b>Directive 2002/96/EC</b>	<b>Waste electrical and electronic equipment; WEEE</b> (As applicable)

### Standards:

<b>Emission:</b>	<b>EN 61000-6-3; Electro magnetic Compatibility</b> <b>Generic standards - Emission</b>
<b>Immunity:</b>	<b>EN 61000-6-2; Electro magnetic Compatibility;</b> <b>Generic standards - Immunity</b>
<b>Safety (Power Supply):</b>	<b>EN 60950; (or other)</b> <b>Safety of information technology equipment</b>
<b>Radio</b>	<b>EN 301489</b>

System: **FLIR T4XX series**

FLIR Systems AB  
Quality Assurance

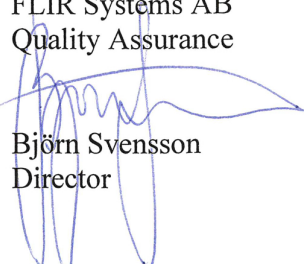

Björn Svensson  
Director