



The Sensepoint Plus monitors flammable, toxic and Oxygen gas hazards in potentially explosive atmospheres

Sensepoint Plus



One-Stop Shop

- Flammable, toxic and Oxygen versions available
- Suitable for indoor or outdoor use
- IP65 as standard

Proven Sensor Technology

- Surecell™ electrochemical sensors
- Poison resistant catalytic bead
- Fast and reliable
- Typical 2 to 5 years operational life

Global Certifications

- US and Europe
- UL and ATEX hazardous area approvals

Convenient to Use

- Industry standard 4-20mA output
- Built in 'inhibit' switch
- User configurable setting
- Ideal for PLC based systems

Cost Effective

- Minimal training required
- One-man operation
- Plug-in sensor replacement
- All necessary accessories included

Friendly Installation

- Universal mounting bracket
- Metric and NPT compatible
- Suitable for conduit or armored cable/glands installations

Range of Accessories

- Calibration cup
- Duct mounting kit
- Collecting cone

The Sensepoint Plus monitors flammable, toxic and Oxygen gas hazards in potentially explosive atmospheres and provides an industry standard 4-20mA output for connection to a wide range of control equipment. Incorporation of a transmitter at the sensor enables a single user to carry out routine maintenance of the detector and removes the need for additional personnel at the associated controller.

The built-in transmitter includes a user configurable 'inhibit switch' that clamps the current output of the detector to a known level so that during maintenance no false alarms can be triggered at associated control equipment. As such, the Sensepoint Plus can be easily maintained even when used with 'blind' PLC type control systems.

Sensepoint Plus is supplied with all necessary accessories for easy installation. The detector can be mounted on a wall or round support pole using the universal bracket provided. The detector is ideal for use with either conduit or armored cable and glands. A ½"NPT entry and M20 adaptor are supplied as standard. A weatherproof cap is also included for use in the harshest outdoor conditions.

Overall, the Sensepoint Plus provides easy installation and simple maintenance. Using an easy to replace plug-in sensor, downtime is reduced and the on-going costs of ownership is minimized through the use of poison resistant flammable sensors and patented Surecell™ toxic sensor technology.

Sensepoint Plus and the Honeywell Analytic's range of industrial gas detection systems can be trusted to provide a safe working environment for all.



Installation Details




Sensepoint Plus is designed for use in potentially explosive atmospheres. As such, installation should follow national guidelines using suitably approved armored cable and glands (M20 or 3/4"NPT) or conduit (3/4"NPT).


Use screened 0.5mm² (20 AWG) to 2.5mm² (14 AWG) cross sectional area cable, as needed to ensure minimum operating voltage at the detector, depending upon installed cable length.

Various accessories are available for different applications.


Pole Mount




Wall Mount





Duct Mount





Collecting Cone



Dimensions

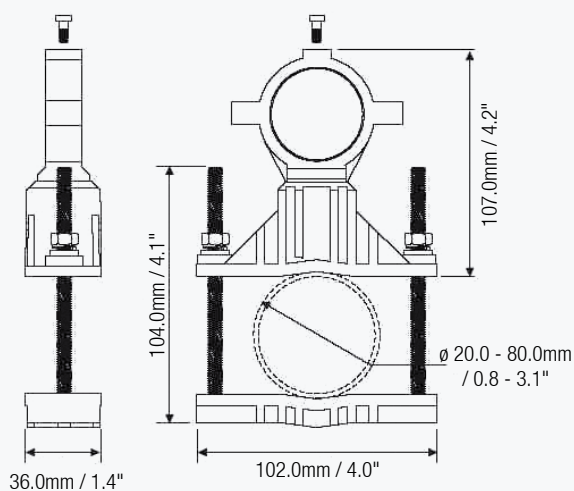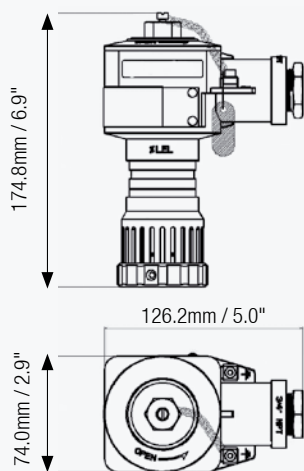

Electrical Connections

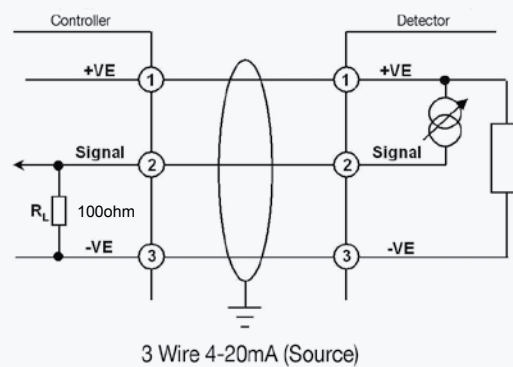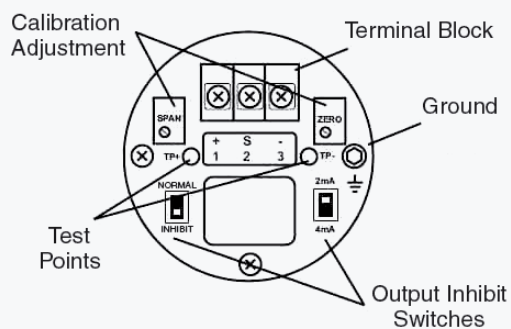

Technical Summary



General Specification						
Use		3-wire, 4-20mA, fixed point gas detector for the protection of personnel and plant from flammable, toxic and Oxygen gas hazards. Incorporating transmitter with user configurable 'inhibit' switch to facilitate one man operation				
Detectable Gases						
Gas		Measuring Range			Operating Temperature *	
Ident	Name	1 #	2	3	Min	Max
F	Flammable	0-100% LEL			-25°C / -13°F	55°C / 131°F
O	Oxygen	0-25% VOL			-15°C / 5°F	40°C / 104°F
C	Carbon Monoxide +	0-200ppm	0-500ppm		-25°C / -13°F	55°C / 131°F
H	Hydrogen Sulphide +	0-50ppm	0-20ppm	0-100ppm	-25°C / -13°F	55°C / 131°F
G	Hydrogen	0-1000ppm			-5°C / 23°F	40°C / 104°F
* SureCell™ Sensing Technology		* Standard			* Check certified temperature	
Construction						
Electrical		3 wire connection, 12-30Vdc, 4-20mA (source), common 0Vdc 3 x screw terminals for 0.5mm² (20AWG) to 2.5mm² (14AWG) Maximum operating current: 200mA @12VDC/ 100mA @24VDC (flammable), 30mA @12VDC/ 15mA @24VDC (toxic and Oxygen) Maximum peak in rush current: 400mA @12VDC/ 200mA @ 24VDC				
Signal		4-20mA 2mA or 4mA 0mA 22mA Normal operation: 0-100% full scale Output inhibited (17.4mA Oxygen only) Sensor fault Maximum over range				
Material		Main body: Powder coated aluminum (ADC12) Sensor: 316 stainless steel Weatherproof cap: Aluminum, 316 stainless steel mesh				
Weight		950g				
Certification		Ex II 2 G D EEx d IIC T4 T _{amb} = -25°C to +55°C / -13°F to +131°F			Class 1, Div 1, Groups B, C, D T _{amb} = -25°C to +55°C / -13°F to +131°F	
Applicable Standards		North America: UL1203 Standards Europe: CE, ATEX, EMC (EN50270) Contact Honeywell Analytics for latest approval information				
Environmental						
IP Rating		IP65 as standard in accordance with EN60529:1992				
Operating Temperature		Dependent upon gas type and certification				
Operating Humidity Range		Continuous: 20-90% RH (non condensing), Intermittent: 10-99% RH (non condensing)				
Operating Pressure		90-110kPa				
Storage Conditions		Instrument -40°C to +50°C (-40°F to +122°F)				

* Oxygen detection products must only be used to detect oxygen depletion in air.



Ordering Information



Ordering Information

e.g. SP PL **U** X **F** **1** = SPPLUXF1

STANDARDS	RANGE	GAS TYPE
U USA (UL) A Europe (ATEX)	1 } Refer to 2 } Detectable Gases 3 } Table Above	F Flammable O Oxygen C Carbon Monoxide H Hydrogen Sulphide G Hydrogen

Standard Supply

Each detector is supplied complete with 3/4"NPT entry, 3/4"NPT to M20 adaptor, wall mounting bracket, pole mounting bracket, weatherproof cap, Allen keys (for bracket), and instruction leaflet all sealed in a plastic bag inside a shipping carton

Shipping Details

Shipping carton dimensions: (L) 312mm (12.3") x (W) 223mm (8.8") x (D) 110mm (4.3")
 Approximate weight: 1000g

Optional Accessories

SPPGCC	Collecting cone
SPPPCAL	Flow adaptor
SPPPDMM	Duct mounting kit

Calibration Equipment

Contact Honeywell Analytics Representative



Our Product Range



Fixed Gas Monitoring

Honeywell Analytics offers a wide range of fixed gas detection solutions for a diverse array of industries and applications including: Commercial properties, industrial applications, semiconductor manufacturers, energy plants and petrochemical sites.

- » Detection of flammable, oxygen and toxic gases (including exotics)
- » Innovative use of 4 core sensing technologies – paper tape, electrochemical cell, catalytic bead and infrared
- » Capability to detect down to Parts Per Billion (ppb) or Percent by Volume (%v/v)
- » Cost effective regulatory compliance solutions

Portable Gas Monitoring

When it comes to personal protection from gas hazards, Honeywell Analytics has a wide range of reliable solutions ideally suited for use in confined or enclosed spaces. These include:

- » Detection of flammable, oxygen and toxic gases
- » Single gas personal monitors – worn by the individual
- » Multi-gas portable gas monitors – used for confined space entry and regulatory compliance
- » Multi-gas transportable monitors – used for temporary protection of area during site construction and maintenance activities

Technical Services

At Honeywell Analytics, we believe in the value of great service and customer care. Our key commitment is providing complete and total customer satisfaction. Here are just a few of the services we can offer:

- » Full technical support
- » Expert team on hand to answer questions and queries
- » Fully equipped workshops to ensure quick turnaround on repairs
- » Comprehensive service engineer network
- » Training on product use and maintenance
- » Mobile calibration service
- » Customised programmes of preventative/corrective maintenance
- » Extended warranties on products

Find out more

www.honeywellanalytics.com

Contact Honeywell Analytics:

Europe, Middle East, Africa, India

Life Safety Distribution AG
Wilstrasse 11-U31
CH-8610 Uster
Switzerland
Tel: +41 (0)44 943 4300
Fax: +41 (0)44 943 4398
gasdetection@honeywell.com

Americas

Honeywell Analytics Inc.
405 Barclay Blvd.
Lincolnshire, IL 60069
USA
Tel: +1 847 955 8200
Toll free: +1 800 538 0363
Fax: +1 847 955 8208
detectgas@honeywell.com

Asia Pacific

Honeywell Analytics Asia Pacific
#508, Kolon Science Valley (I)
187-10 Guro-Dong, Guro-Gu
Seoul, 152-050
Korea
Tel: +82 (0)2 2025 0300
Fax: +82 (0)2 2025 0329
analytics.ap@honeywell.com

Technical Services

HAexpert@honeywell.com

www.honeywell.com

Please Note:

While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication is not intended to form the basis of a contract.