




PI 1M

Short wavelength and ultra compact
infrared camera for non-contact
temperature measurement of
metallic surfaces

innovative infrared technology


↑ 924,6°C

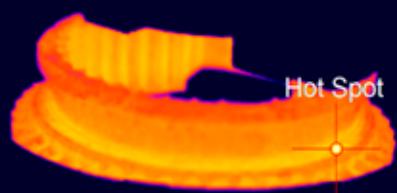

optris® PI 1M

TECHNICAL DATA

**Short wavelength
and ultra compact
infrared camera for
metal surfaces**

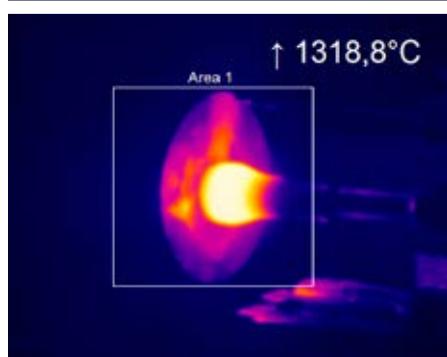

Features:

- Wide measurement ranges from 450 °C to 1800 °C without sub-ranges
- Highly dynamic CMOS detector with up to 764 x 480 pixels resolution
- Up to 1 kHz frame rate for fast processes
- Real-time analog output with 1 ms response time
- Extensive software package and SDK included
- Optional 1kHz linescanning function

PI 1M

3.150 €
incl. software
& driver

Typ	PI 1M	
Optical resolution (switchable)/ Frame rate	764 x 480 pixels @ 32 Hz 382 x 288 pixels @ 80 Hz (switchable to 27 Hz) ¹⁾ 72 x 56 pixels @ 1 kHz ¹⁾ 764 x 8 pixels @ 1 kHz ¹⁾	
Detector	CMOS (15 µm x 15 µm)	
Spectral range	0.85 – 1.1 µm	
Temperature ranges	450 ²⁾ ... 1800 °C (27 Hz mode) 500 ²⁾ ... 1800 °C (80 Hz and 32 Hz mode) 600 ²⁾ ... 1800 °C (1 kHz mode)	
Optics	FOV @ 764 x 480 px: 39° x 28° (f = 16 mm) 26° x 16° (f = 25 mm) 13° x 8° (f = 50 mm) 9° x 5° (f = 75 mm)	FOV @ 382 x 288 px: 20° x 15° (f = 16 mm) 13° x 10° (f = 25 mm) 7° x 5° (f = 50 mm) 4° x 3° (f = 75 mm)
Thermal sensitivity (NETD) ³⁾	< 1 K (700 °C), < 2 K (1000 °C)	
Accuracy (at T _{amb} = 23 °C)	±1 % of reading (object temperature < 1400 °C)	
PC interface	USB 2.0 / optional USB to GigE (PoE) interface	
High speed analog output (@ 1 kHz mode)	1 ms real-time analog output (0 - 10 V) of 8 x 8 pixels (position selectable)	
Standard process interface (PIF)	0 – 10 V input, digital input (max. 24 V), 0 – 10 V output	
Industrial process interface (PIF)	2x 0-10 V inputs, digital input (max. 24 V), 3x 0 – 10 V outputs, 3x relay (0 – 30 V/ 400 mA), fail-safe relays	
Cable length (USB)	1 m (standard), 5 m, 10 m 5 m and 10 m also available as HT cable (180 °C)	
Ambient temperature	0 ... 50 °C	
Storage temperature	-40 ... 70 °C	
Relative humidity	20 – 80 %, non-condensing	
Enclosure (size/ rating)	46 mm x 56 mm x 90 mm/ IP 67 (NEMA 4) ⁴⁾	
Weight	320 g, incl. lens	
Shock ⁵⁾	IEC 60068-2-27 (25 g and 50 g)	
Vibration ⁵⁾	IEC 60068-2-6 (sinus-shaped)/ IEC 60068-2-64 (broadband noise)	
Tripod mount	1/4 – 20 UNC	
Power supply	USB powered	
Scope of supply (standard)	USB camera with 1 lens, lens protection tube incl. protective window, USB cable (1 m), Table tripod, PIF cable (1 m) incl. terminal block, Software package optris® PI Connect, Aluminum case, Optional: CoolingJacket, High temperature cable	

¹⁾ Positioning of choice within FOV

²⁾ Lenses with focal lengths f = 50 mm and f = 75 mm have an elevated starting temperature of +75 °C

³⁾ At 27 Hz, 32 Hz and 80 Hz ⁴⁾ Only applies when using protection tube

⁵⁾ For further information see operator's manual